

## SWIMMING POOL BACKWASH / WATER DISPOSAL

IS121

Responsible Officer: EHO


Issue Date: 15/05/2020

Next Review Date: 15/05/2023

Backwash water and/or water from emptying the pool should not enter the septic tank as it will flood the tank and affect the bacteria necessary for sewage treatment. Water should be directed to an underground soakage or via a gully trap to the common effluent scheme.


- The gully trap must be located between the septic tank and the soakage area/common effluent connection point.
- Installation of the gully trap must be done by a licenced plumber.
- The gully trap must be installed such that there is no ingress of storm water.
- Pool water can be discharged to a gully trap by means of a flexible hose.
- See attached drawing for an example of a gully trap installation.

### TYPICAL CONNECTION OF PUMPED WASTE DISCHARGE FROM SWIMMING POOLS

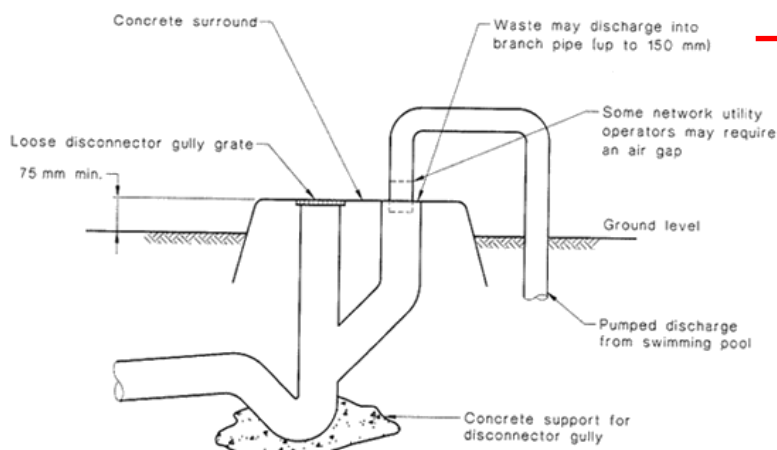

Not to be a permanent connection to avoid backflow of sewage into pool

### TYPICAL APPLICATIONS

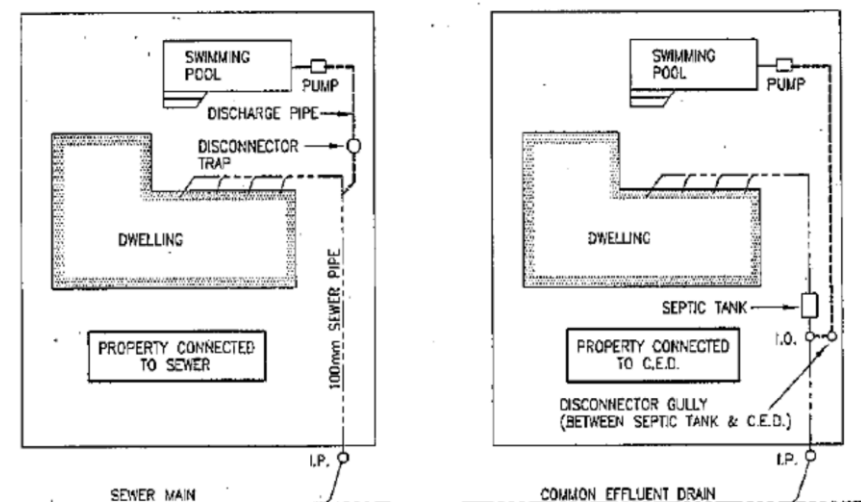



# Disposal of Swimming Pool Backwash Water

Issued April 2004

*EPA 181/04: This document replaces the EPA Information Sheet No. 13 'Disposal of Backwash Water from Swimming Pools' issued in September 1999. It provides information on your obligation to ensure backwash water does not enter our natural waterways.*

## Introduction

Swimming pool water contains a range of treatment products such as chlorine, salt and acid, and filtration media (sand, diatomaceous earth). In addition, the water contains dirt particles (sediments), wind-blown materials such as leaves and lawn cuttings, as well as body oils, sunscreen residues and potentially harmful bacteria.

In the normal operation of swimming pools, these materials are collected by the filtration system and captured or contained in the filter. To work efficiently, swimming pool filters need to be cleaned by backwashing all the captured materials out of the filter. South Australian legislation prohibits the disposal of backwash water from swimming pools into the stormwater system as it can harm our creeks, rivers, lakes and coastal waters.

## Your obligations

The principal legislation addressing pollution in South Australia is the *Environment Protection Act 1993* (the Act). In particular, section 25 imposes the general environmental duty on all persons undertaking an activity that may pollute, to take all reasonable and practicable measures to prevent or minimise any resulting environmental harm.

The *Environment Protection (Water Quality) Policy 2003* (Water Quality Policy) offers the most specific protection for the state's waters. The Water Quality Policy prohibits the pollution of the stormwater system and our natural waters. It has general obligations with which every person, business and industry must comply, as well as specific obligations for particular activities. Failure to comply with any of these obligations may result in a \$300 fine, Environment Protection Order, and/or prosecution.

Clause 17 (1) of the Water Quality Policy states that a person must not discharge or deposit a pollutant listed in Part 1 of Schedule 4 of the Policy *into any waters or onto land where it might enter any waters*. The pollutants listed in Schedule 4 Part 1 include:

- pool backwash water
- pool chemicals.

You are also obliged under the *Public and Environmental Health Act 1987* (Section 18) not to discharge waste in a public place. More specifically, under *the Code of Practice for Swimming Pools*, developed by the South Australian Health Commission, you must dispose of filter backwash water in a way that does not create an offensive situation or nuisance and that is not injurious to health.

## Disposal of backwash water

In areas connected to the sewerage system, backwash water from all swimming pools can be directed to a sewerage drainage point. New swimming pools should be permanently connected to the sewer at the time of installation or construction, and with approval from SA Water – telephone 1300 650 950.

In areas served by a septic tank effluent disposal scheme (STEDS), approval must be granted by the local council operating the STEDS before a permanent connection can be installed. Any backwash water is to bypass the septic tank and be discharged to the drain between the septic tank and the common effluent drain. Under no circumstances should backwash water be discharged into the septic tank.

In unsewered regions, backwash water is to be discharged to a grassed, vegetated or garden area, or a stone-filled trench either open to the surface or underground (similar to a septic tank absorption field). Any surface run-off resulting from the discharge should be contained within the property boundaries.

## Reuse

Backwash water can be discharged to the garden or lawn as a source of irrigation. Salt chlorinated pool water will require salt tolerant plant species, and it is advisable to occasionally water the area with clean, good quality water. (See attached plant list for salt-tolerant species.)

## Glossary

**Septic tank system** – includes all sanitary plumbing fixtures, traps, waste pipes, vents, inspection openings, drains, septic tank and/or other treatment units and methods of effluent disposal.

**Septic tank effluent disposal scheme (STEDS)** – a communal drainage system for the carriage of septic tank effluent and sullage water, owned and maintained by the local council.

**Swimming pool** – refers to all private, commercial and public swimming pools, spas, bathing pools, water slides and therapy pools.

**Diatomaceous earth** – a fine siliceous earth used in filtration.

## References

SA Water, Industrial Waste Section, *Swimming Pool Policy*

South Australian Health Commission, *Code of Practice for Swimming Pools*

Wayne A Brown, Rural Solutions SA, *Salt Tolerant Plant Species List*.

---

## FURTHER INFORMATION

### ***Legislation***

Legislation may be viewed on the Internet at: [www.parliament.sa.gov.au/dbsearch/legsearch.htm](http://www.parliament.sa.gov.au/dbsearch/legsearch.htm)

Copies of legislation are available for purchase from:

Government Information Centre  
Lands Titles Office, 101 Grenfell Street  
Adelaide SA 5000

Telephone: 13 23 24  
Internet: [shop.service.sa.gov.au](http://shop.service.sa.gov.au)

### ***For general information please contact:***

Environment Protection Authority  
GPO Box 2607  
Adelaide SA 5001

E-mail: [epainfo@epa.sa.gov.au](mailto:epainfo@epa.sa.gov.au)

Telephone: (08) 8204 2004  
Facsimile: (08) 8204 9393  
Freecall (country): 1800 623 445  
Internet: [www.epa.sa.gov.au](http://www.epa.sa.gov.au)

## Salt tolerant plant species

Botanical Name	Common Name	Comments
<b>Shrubs</b>		
<i>Melaleuca halmaturorum</i>	SA coastal paperbark	3-4 m high, white bottlebrush-like flowers
<i>Melaleuca brevifolia</i>	Salt river melaleuca	2-3 m high, white bottlebrush-like flowers
<i>Melaleuca decussata</i>	Totem poles	1-1.5 m high, pink/purple bottlebrush-like flowers
<i>Melaleuca lanceolata</i>	Moona	4-8 m high, white bottlebrush-like flowers
<i>Melaleuca uncinata</i>	Broombush	3-6 m high, cream bottlebrush-like flowers
<i>Melaleuca ericifolia</i> *	Swamp teatree	3-6 m high, white bottlebrush-like flowers
<i>Callistemon rugulosus</i>	Scarlet bottlebrush	3-4 m high, scarlet flowers
<i>Atriplex nummularia</i>	Old man saltbush	2-3 m tall, silver foliage with very small flowers
<i>Atriplex cinerea</i>	SA coastal saltbush	2 m x 2 m, silver foliage with very small flowers
<i>Acacia cyclops</i> *	Coastal wattle	4 m high x 4 m wide, yellow flowers and fast growing
<i>Myoporum insulare</i>	Boobialla	3-5 m high, small white flowers
<b>Trees</b>		
<i>Banksia marginata</i>	Silver banksia	4-8 m high, clustered yellow flowers
<i>Acacia salicina</i>	Pt Broughton wattle	5-10 m high, cream flowers. Does sucker.
<i>Acacia stenophylla</i>	River cooba	5-8 m high, weeping foliage
<i>Casuarina obesa</i> *	WA swamp oak	10-15 m high, needle-like foliage

\* Not a South Australian species

List compiled by Wayne A Brown, Rural Solutions SA

## Nurseries

For stockists of the plants listed above please look in the Yellow Pages under 'nurseries'.