PRINCIPAL OFFICE:

8 Elizabeth Street, Maitland Telephone (08) 8832 0000

ALL CORRESPONDENCE TO:

PO Box 57, MAITLAND, SA 5573 Fax (08) 8853 2494

> Email: admin@yorke.sa.gov.au Website: www.yorke.sa.gov.au



WASTEWATER SYSTEMS

IS029
Responsible Officer: Environmental Health Officer
Issue Date: 05/05/2022
Next Review Date: May 2026

Wastewater Systems - Things to be considered before you make a choice

In areas where a local sewer or common effluent scheme is not available, householders need to manage their household wastewater on site. Most commonly, householders will choose between septic/soakage and an aerobic wastewater treatment system. However, a number of factors should be considered before a choice is made.

Advice and a soil report from a consulting wastewater engineer are required under the South Australian Public Health (Wastewater) Regulations 2013. It is better to spend the money and effort on getting a system that will work well on your site and suit your lifestyle, after all you want a system that is trouble free and maintains a safe and healthy environment for your family.

NOTE: It is important that the requirements of the wastewater system be considered during the planning stage of any development.

Septic/Soakage

This system is suitable for sites with moderate to well drained soils. A **soil report** is required for the location where the soakage bed or soakage tunnels are to be situated. A geotechnical engineer needs to be engaged to do this; such an engineer should also be able to advise on the installation, giving attention to the slope of the block and whether a pump would need to be installed to pump the effluent up to the desired soil profile. A soil report that indicates moderate soakage with a reasonable soil profile will normally require a minimum of 90m² of soakage.

Septic/soakage is relatively low maintenance, with the tank having to be desludged every 4 years. The soakage bed can be covered with lawn and used as open space, but it cannot be used as a trafficable area, and therefore cannot have cars or boats driven over it or parked on it.

The soakage bed needs to be 3m from any building on site and 2.5m from all boundaries and the septic tank.

Aerobic System

The wastewater is treated and disinfected so that it can be disposed of via salt tolerant plants that are planted in a dedicated irrigation area. A **soil report** is required to determine the area of irrigation necessary to dispose of the effluent. The wastewater engineer should also design the irrigation area, giving attention to layout of irrigation heads and pump required. The irrigation area is normally a minimum of 200m², but a greater irrigation may be needed in an area where soil types indicate poor permeability, such as clay.

With surface irrigation the dedicated irrigation area is a non-contact area and is not usable as open space. It must be planted out correctly and have warning signs put up to let people know effluent is being sprayed over the area. An area equivalent to half the irrigation area must be available for open space; therefore, a block must have at least 300m² of land available before one even thinks about

buildings. The recreational area or open space must be private and therefore cannot be located at the front of the dwelling.

The property owner should discuss with the wastewater engineer the use they will be making of the land area and whether they intend to erect a shed or install a swimming pool at a future date. Because the surface irrigation area removes much of the land space from future development it may be that sub-surface disposal should be considered.

Aerobic systems are high maintenance – the system needs to be serviced by a qualified contractor every 3 months and the reports must be submitted to Council. The tank requires chlorine to be dosed into the effluent and a blower needs to operate 24hours a day to provide aeration. The system must have an audible and visual alarm installed to alert the owner to any malfunction of the pump.

The irrigation system needs to be installed by a professional irrigation installer/plumber with the plumber provided a Certificate of Compliance at the completion of the job.

Alternative Systems

<u>Evapo-Transpiration/Absorption/Seepage System (ETA/ETS)</u> – recommended in areas with low permeability soils. System requires planting out with plants that have high uptake of water via transpiration.

<u>Wisconsin Mound</u> – often used where a very shallow layer of soil overlays a limiting layer such as rock. Site needs to be relatively flat with environmental conditions that promote evaporation (sunny and good air flow). Depending on the soil classification of the site a mound may require a substantial area of land.

Both of the above systems need to be designed and installed by qualified technicians and work best incorporating pressure dosing. They may be more expensive to set up initially but in difficult areas give a better long term option.

Holding Tanks

Holding tanks are not favoured by Councils due to the high cost of continually having them pumped out. In certain situations, however, they are the only option where:

- A property is within 100 metres of the high water mark of the coast, and therefore, there is a risk of untreated effluent reaching the marine environment; <u>AND</u>
- The property has limited space to install an alternative system that would treat the effluent to an acceptable quality for discharge into such a sensitive environmental area.

THE APPLICATION PROCESS

A "one size fits all" application form; SF020 On-Site Wastewater System Application, must be completed and submitted along with the relevant mandatory documentation to Council. The application may be submitted by:

- Email: to admin@yorke.sa.gov.au; or
- Delivered to one of our Council Offices (Maitland/Minlaton/Yorketown); or
- Posted to:

Yorke Peninsula Council PO Box 57 Maitland SA 5573

Please ensure the owner and applicant (if applicable) sign the application form – the application cannot be processed without the correct signatures.

Due to the varied nature of wastewater applications, our clerical officers will allocate the appropriate fees for your application following application submission. Our clerical officers will notify you of the set fees by email. If you wish to establish the fees for a particular application prior to application submission, please contact Council.

If you are lodging a Development Application, it is recommended to submit the wastewater application to Council at the same time. These applications are to be submitted with the relevant mandatory documentation, separately (i.e. Development Applications are submitted via the Plan SA website and Wastewater Applications are submitted to Council). Please ensure plans remain consistent throughout process, if there are to be any variations to your building or site through various stages of Development (planning / building), please consult council as you may need provide updated plans for the wastewater application.

All work must be performed by a licensed plumber, the plumber is often the applicant – if the applicant is not the plumber but you know the plumber who will be performing the work this can be made as a notation on the form indicating the licence number of the plumber.

PLANS AND DOCUMENTS REQUIRED TO BE DRAWN AND SUPPLIED WITH APPLICATION


Site Layout Plan(s) – Drawn to scale (1:100 or 1:200 typical) including:

Block dimensions.
Contours indicating natural ground fall.
Proposed location of the building and all other structures including sheds, swimming pools
and paving
☐ Indicate proposed and existing building/structure details
Position of the proposed devices/components (e.g. septic tank, pump sump, distribution
sump and effluent disposal system) including distances from boundaries, buildings etc.
Details of any site modifications e.g. benching, cutting and filling
Details of any well, bore or dam used or likely to be used for human and/or domestic use
Details of water source used for agricultural, aquaculture or stock purpose
Details of any water course, identified on a current 1:50 000 Department of Environment,
Water and Natural Resources topographic map, used or likely to be used for human and/or
domestic purposes
Full details of the disposal system including length, width and depth
Depth from surface level to the top of the nominated method of effluent disposal
Where connection to a septic tank effluent disposal scheme or local sewer scheme is
available (Common Wastewater Management Schemes or CWMS), show:
☐ the line of drain

		the connection point. Note: Details on the connection location and requirements can be obtained from the Council.
Buildi showir	-	out Plan – A detailed building layout plan must be provided, drawn to a scale of 1:100,
	-	esition and description of all the sanitary fixtures to be connected to the septic tank e.g. water closet pan, basin, bath, shower, laundry trough, washing machine, kitchen sink, dishwasher,
	Metho	food waste disposal unit and spa bath together with its capacity d of connecting the fixtures to the drainage system – including: location of sewer drain inspection openings and inspection shafts junctions and bends size and grade of sewer drain position and size of: traps: sanitary fixtures floor waste gully and overflow relief gully vents stacks waste pipes tended use of the rooms within the building (e.g. bedroom, kitchen, family, office,
	consul	ting room, dining, bar etc.) puilding is multi-story a separate building plan is required for each level n-residential buildings e.g. offices, shops, hotels, hospitals etc. it is necessary to: State the maximum number of persons using the system. Provide details and position of trade waste components
Engin	eering	Documents
	A wast term e	stewater systems the application must include: rewater / geotechnical engineers report confirming the site intended is suitable for long ffluent disposal or use of recycled wastewater. This should include: Soil report Site assessment details Wastewater design / plan
For red	In som	etbacks for wastewater devices/components e situations, reduced setbacks for devices/components (below the minimum legislative ements) may be necessary; in these situations, engineering advice is required for their ation.
		ants should note that where the application or plans show insufficient details, delays ay result.
Furthe	r Infor	mation
		nation and advice on the installation of wastewater systems may be obtained by uncil's Environmental Health Officer on:
Maitlar	nd Offic	e (08) 8832 0000

EXAMPLE PLANS


The following example plans are not to scale

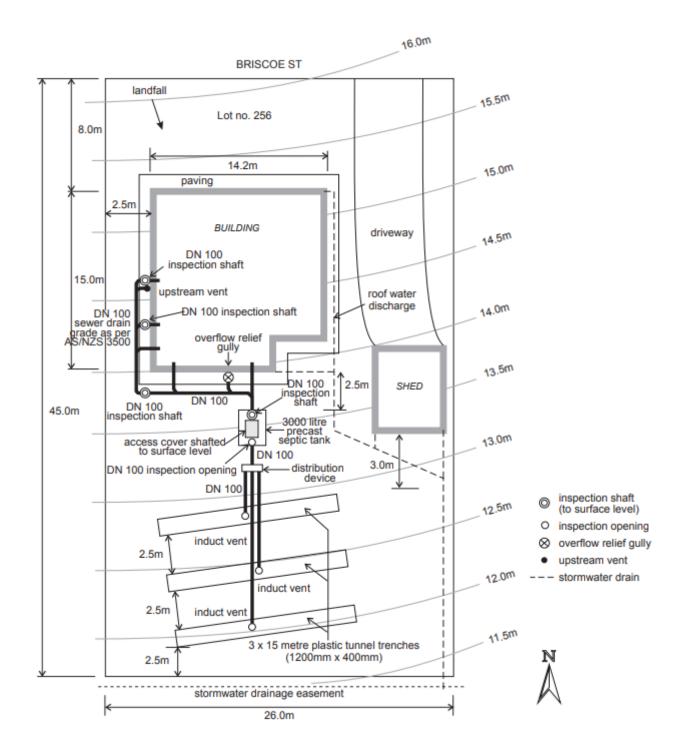

To be drawn to scale of 1:500

FIGURE 1: TYPICAL SITE LAYOUT PLAN

(schematic & reduced for printing)

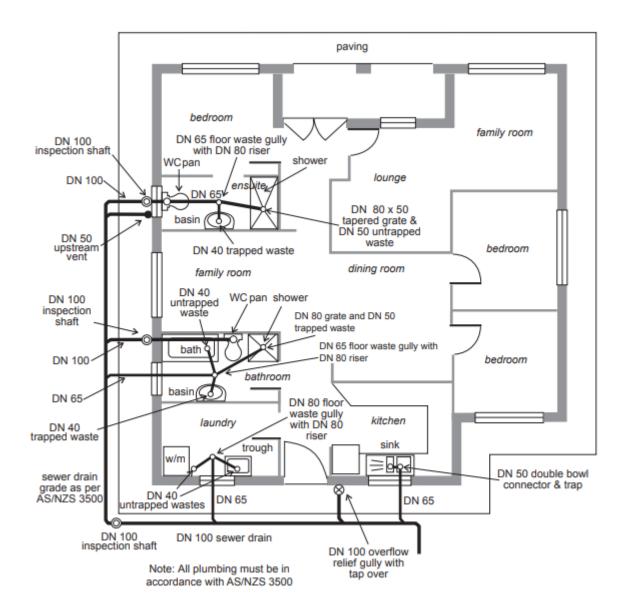

To be drawn to scale of 1:100

FIGURE 2: TYPICAL BUILDING LAYOUT PLAN

(schematic & reduced for printing)